

(12) UK Patent Application (19) GB (11) 2 349 982 (13) A

(43) Date of A Publication 15.11.2000

(21) Application No 9910857.3

(22) Date of Filing 11.05.1999

(71) Applicant(s)
Nokia Mobile Phones Limited
(Incorporated in Finland)
Keilalahdentie 4, 02150 Espoo, Finland

(72) Inventor(s)
Alan Johnson

(74) Agent and/or Address for Service
Nokia IPR Department
Nokia House, Summit Avenue, Southwood,
FARNBOROUGH, Hampshire, GU14 0NG,
United Kingdom

(51) INT CL⁷
H01Q 5/00 1/24 9/04

(52) UK CL (Edition R)
H1Q QJC

(56) Documents Cited
EP 0630069 A WO 98/44588 A US 5561435 A

(58) Field of Search
UK CL (Edition Q) H1Q QAA QAX QJC QKA
INT CL⁶ H01Q 1/38 5/00 9/04
ONLINE WPI EPODOC PAJ

(54) Abstract Title
Antenna

(57) A dual frequency antenna, which is particularly suited to mobile communications, has a radiating/receiving conductor plate 2 and a ground plane 3, which are coupled through two coupling means 4 and 7, and a coaxial feed 5. The coupling of the conductor plate 2 with ground plane 3 by the first coupling means 4 defines a first antenna resonant frequency whilst the second coupling means provides a high impedance path between the conductor plate of a ground plane for this frequency. The coupling of the conductor plate with the ground plane 3 by the second coupling means 7 defines the second antenna resonant frequency whilst the first coupling means provides a high impedance path between the conductor plate and ground plane for this frequency. A further embodiment includes a controller (9, fig 4) which facilitates the use of the second coupling (8, fig 4), in order to switch the antenna between dual and single frequency modes.



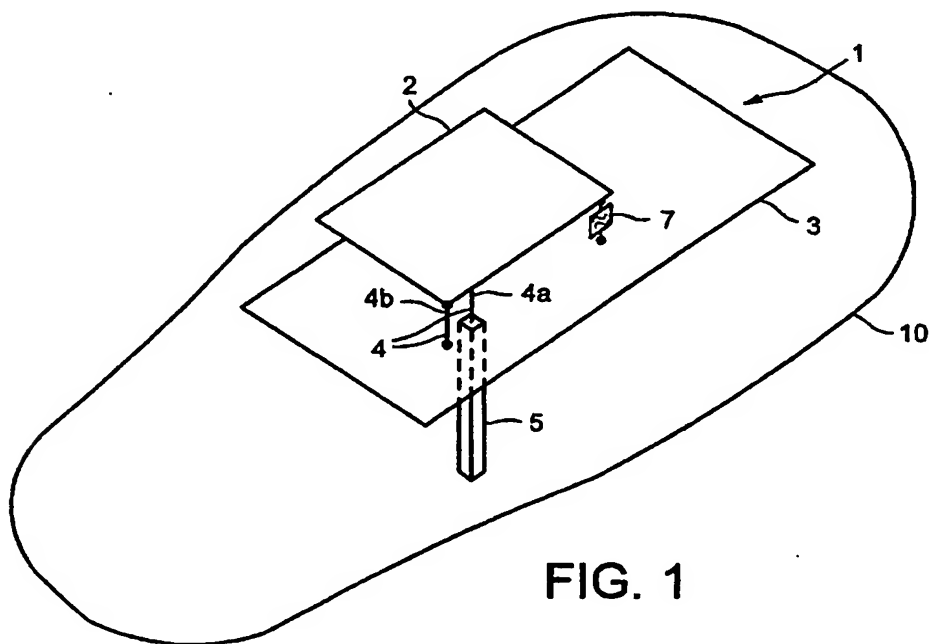




FIG. 1

At least one drawing originally filed was informal and the print reproduced here is taken from a later filed formal copy.

This print takes account of replacement documents submitted after the date of filing to enable the application to comply with the formal requirements of the Patents Rules 1995

GB 2 349 982 A

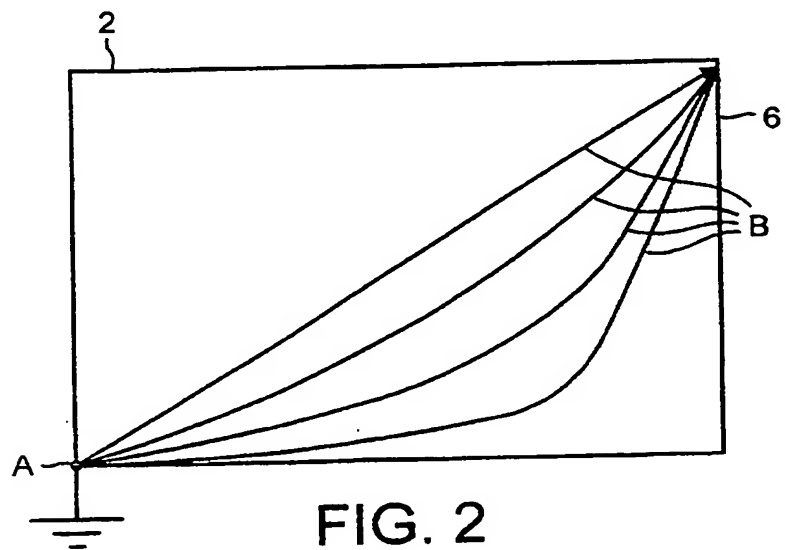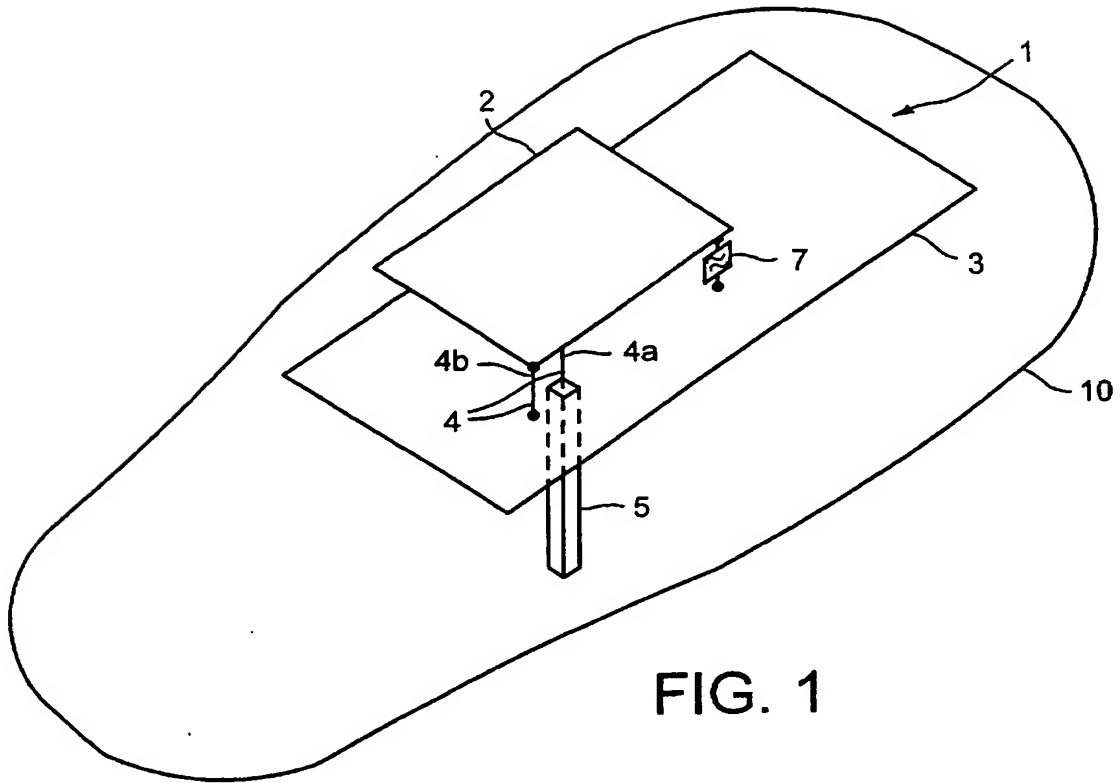

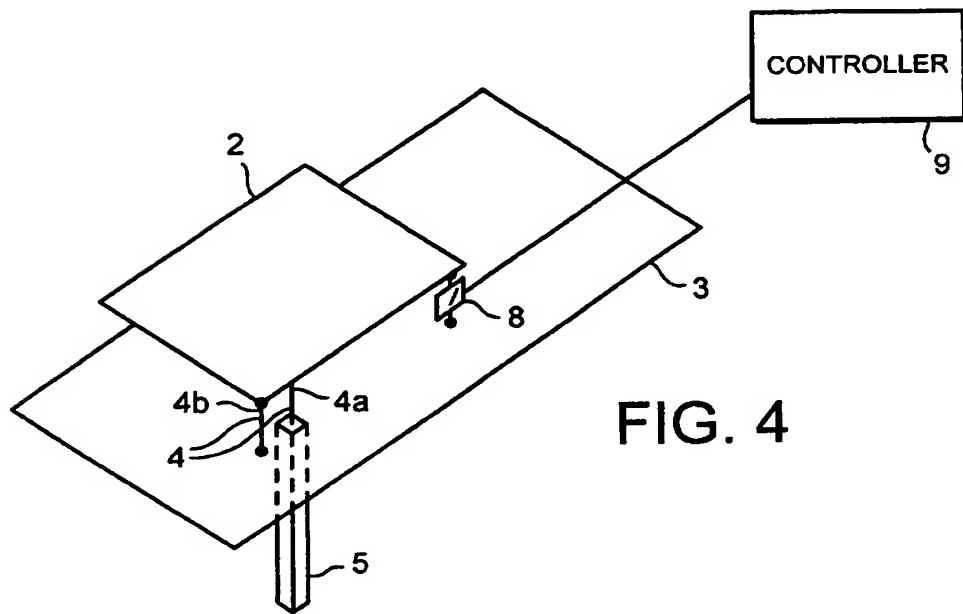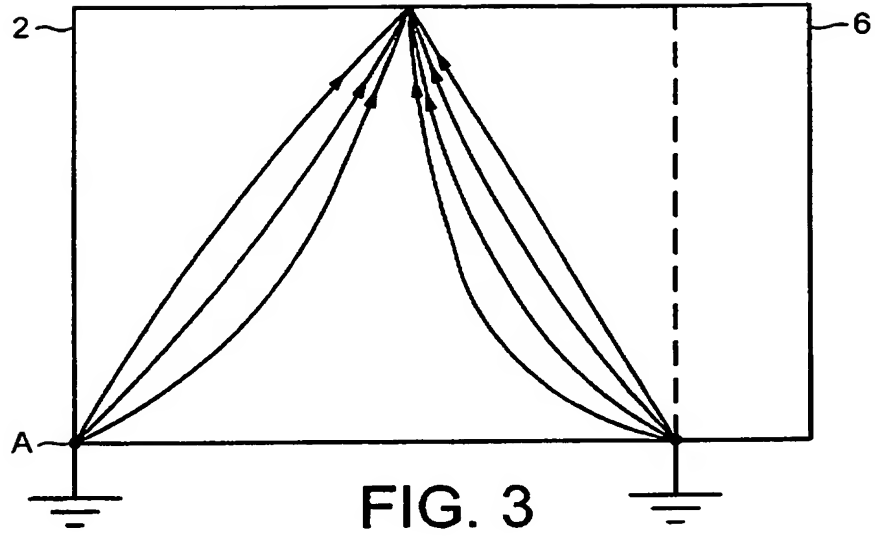

ANTENNA

- 5 This invention relates to an antenna, and in particular a dual resonance antenna.

With the increasing demand for mobile communications different cellular standards have been developed, many of which operate at different
10 frequencies. For example, the global system for mobile communication (GSM) standard defines the primary frequency band for GSM as being from 890 MHz to 960 MHz, while the digital cellular system (DCS) standard defines the primary frequency band for DCS as being from 1710 MHz to 1880 MHz.

- 15 The different cellular systems can operate in isolation or together. To maximise the use of these different cellular systems and increase the use and mobility of mobile communication devices it is desirable for mobile communication devices to be able to roam between the different cellular systems.

20 To allow a mobile communication device to roam between cellular systems having different operating frequencies the communication device will typically need a dual resonance antenna with one resonating element tuned to one cellular system and a second resonating element tuned to another cellular
25 system. The dual resonance antenna, otherwise known as a dual band antenna, may be in the form of two physically separate antenna housings having separate resonating elements that are fed via the antenna feed. Alternatively, the antenna may have two resonating elements physically coupled in the same housing, with each element having a different resonant
30 frequency.

However, as electronic and communications technologies have advanced, there has been a drive to increase the performance and decrease the size of consumer devices. In particular, in the field of mobile communications, there
5 has been continual demand for increasingly smaller communications devices, such as telephones, computers and personal organisers, but without a decrease in performance. However, as electronic equipment has rapidly reduced in physical size due to the development of integrated circuits, the antenna for communication equipment still remains large compared with the
10 equipment itself.

From the point of view of facilitating the operation of mobile communication devices low profile antennae suitable for mounting within a communication device have become increasingly popular. An example of such an antenna is
15 a planar inverted antenna where coupling the resonating element to a ground plane to produce a planar inverted F antenna (PIFA) can halve the length of the resonating element.

A PIFA comprises a flat conductive sheet supported a height above a
20 reference voltage plane such as a ground plane. The sheet is typically separated from the reference voltage plane by a dielectric, for example air. A corner of the sheet is coupled to the ground via a grounding stub, otherwise known as a shorting pin, and a feed is coupled to the flat sheet near the grounded corner for driving the antenna. The feed may comprise the inner
25 conductor of a coaxial line. The outer conductor of the coaxial line terminates on and is coupled to the ground plane. The inner conductor extends through the ground plane, through the dielectric (if present) and to the radiating sheet.

The PIFA forms a resonant circuit having a capacitance and inductance per
30 unit length. The feed point is positioned on the sheet a distance from the

shorting pin such that the impedance of the antenna at that point matches the output impedance of the feed line, which is typically 50 ohms. The main mode of resonance for the PIFA is between the short circuit and the open circuit edge. Thus the resonant frequency supported by the PIFA is dependent on the length of the sides of the sheet and to a lesser extent the distance and the thickness of the sheet.

However, a dual band PIFA antenna having two resonating elements still increases the size of the antenna thus compromising the ability of the antenna to be mounted within a communication device.

In accordance with an aspect of the present invention there is provided an antenna comprising an electrical reference plane; a planar conductive element, the electrical reference plane and planar conductive element being electrically coupled via a first coupling means to define a first antenna resonant frequency; and a second coupling means arranged to provide a high impedance path between the electrical reference plane and the planar conductive element at the first antenna resonant frequency and a lower impedance path between the electrical reference plane and planar conductive element at a second frequency to define a second antenna resonant frequency.

This provides the advantage of a dual band antenna having a smaller size than a conventional low profile dual resonance antenna.

25

The overall electrical length of the planar conductive element determines the antenna's resonant frequency. When the planar conductive element, otherwise known as a resonator element, has a single coupling to the reference plane the electrical length, and hence resonance, is determined by the length and width of the resonator element with respect to the coupling. When the

30

resonating element has a second coupling to the reference plane the electrical length is determined by the width of the element and the distance between the two coupling points. Thus a single resonator element can have a number of different electrical lengths depending on how the element is electrically coupled to the electrical reference plane.

Further, the first resonant frequency can be tuned by varying the length of the resonator element while the second resonant frequency can be tuned by altering the position of the coupling of the second coupling means to the resonator element. Thereby, the present invention provides the advantage of allowing the first and second resonant frequencies to be tuned substantially independently.

Generally the antenna includes a feed section comprising the first coupling means and a conducting element arranged parallel to each other with the conducting element being connected to a feed such that the first coupling means and the conducting element form a transmission line.

Since the feed section is arranged as a transmission line, energy is contained and guided between the conductors of the transmission line. This results in a low Q factor and hence a higher impedance bandwidth for the first resonant frequency compared with conventionally fed planar antennas. Thus, the bandwidth is increased considerably while retaining the efficiency, size and ease of manufacture of planar antennas.

Suitably, the second coupling means comprises a filter.

By using a filter which has a high impedance at the first resonant frequency and a low impedance at the second resonant frequency the planar conductive element can have two resonant frequencies simultaneously.

Preferably, the second coupling means comprises a switch movable between a first position for electrically isolating the electrical reference plane and planar conductive element and a second position for electrically coupling the electrical reference plane and planar conductive element.

The invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows an antenna according to a first embodiment of the present invention;

Figure 2 illustrates the current flow for an antenna according to the present invention when operating at a first resonant frequency;

Figure 3 illustrates the current flow for an antenna according to the present invention when operating at a second resonant frequency;

Figure 4 shows an antenna according to a second embodiment of the present invention;

In a first embodiment, shown in figure 1, is a radiotelephone 10 having an antenna 1. The antenna 1 comprises a planar conductive element 2, otherwise known as a resonator element, disposed opposite an electrical reference plane 3, commonly a ground plane. A feed section 4 provides both the feed 4a to drive the resonator element 2 and a first coupling means 4b for coupling the resonator element 2 to the ground plane 3. The first coupling means 4b in this embodiment comprises a planar coupling strip. The feed 4a is coupled to transmission line 5 which conducts a received and/or transmitted RF signal between the feed 4a and a transceiver (not shown).

The feed 4a and planar coupling strip 4b are positioned in parallel to form a transmission line as described in GB patent application 9811669.

- 5 The coupling point of the planar coupling strip 4b to the resonator element 2 defines an electrical point A on the resonator element 2, which acts as a first current source. The electrical point A defines an electrical edge on the resonator element from which the electrical length of the resonator element 2 is defined.

10

- The electrical length of the resonant circuit determines the resonant frequency of the antenna. Therefore, when resonator element 2 is coupled to ground plane 3 solely by the planar strip 4b the electrical length of the resonator element 2 extends from the open circuit on an edge 6 of the resonator element 2 to point A (otherwise known as grounding point A) at which the planar strip meets the resonator element. Figure 2 illustrates typical current flows B in the resonator element when resonating at the first resonant frequency.

- 15 As would be appreciated by a person skilled in the art variations in the width of resonator element 2 can also result in variations in resonant frequency and bandwidth of the antenna 1.

- The portion of the feed section 4 adjacent the ground plane 3 has an impedance which matches the impedance of the line of the ground plane (typically 50 ohms). The portion of the feed section 4 adjacent the resonator element 2 has an impedance which matches the impedance at the feed point of the resonator element 2, typically of the order of 200 ohms. The impedance varies along the length of the feed section 4 in a uniform manner.

30

The resonator element 2 is also coupled to the ground plane 3 via filter 7. The filter characteristics are chosen so filter 7 acts as a high impedance path at the resonant frequency of the resonator element 2 as determined by the electrical length of the resonator element as described above (i.e. a first resonance frequency). This may, for example, correspond to the GSM frequency range centred around 925 MHz. The impedance of the filter 7 in this frequency range will generally be greater than 5000 ohms.

The filter 7 is also chosen to have a lower impedance, typically less than 5 ohms, at a higher frequency (i.e. at the required second frequency), for example 1795 MHz for the DCS standard. This provides a second grounding point C on the resonator element when the resonator element is required to resonate at this higher frequency.

The second grounding point C acts as a secondary current source effectively altering the electrical length of the resonator element 2 and hence the resonant frequency. Figure 3 shows a typical current flow when grounding point A acts as a first current source and the second grounding point C acts as a second current source.

20

The electrical length of the resonator element is determined, in part, by the distance between the grounding point A and C and will be shorter than the electrical length of resonator element 2 with a single grounding point.

The grounding point C is coupled to the resonator element 2 at a position to provide an electrical length that corresponds with the required second resonance frequency, for example 1795 MHz.

The first resonant frequency of the resonator element 2 can be tuned by varying the length of the resonator element 2, independently of the second

30

resonant frequency. Correspondingly, the second resonance frequency of the resonator element 2 can be tuned by varying the position of the grounding point C, independently of the first resonant frequency.

- 5 Additionally, by using a filter 7 to couple the resonator element 2 to the ground plane 3 at a second grounding point the antenna 1 is able to operate at the first and second resonant frequencies simultaneously.

10 In a second embodiment, as shown in figure 4, the filter 7 is replaced by a switch 8 that is controlled by controller 9. When the switch 8 is in an open position (i.e. open circuit) the resonant frequency is determined, in part, by the length of the resonator element 2 with respect to the grounding point A. When the switch 8 is in a closed position (i.e. closed circuit) the resonant frequency is determined, in part, by the distance between the grounding
15 points A and C in the same manner as described above. Examples of suitable switches are PIN diode, MOSFET, transistor and magnetic field switches.

The present invention may include any novel feature or combination of features disclosed herein either explicitly or implicitly or any generalisation thereof irrespective of whether or not it relates to the presently claimed
20 invention or mitigates any or all of the problems addressed. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention. The applicant hereby gives notice that new claims may be formulated to such features
25 during prosecution of this application or of any such further application derived therefrom. For example, it will be appreciated that additional resonating frequencies can be created by including on the resonator element additional grounding points coupled to the ground plane via either a switch or filter. Further by varying the size of the grounding points on the resonator element
30 the bandwidth of the resonant frequencies can be varied.

CLAIMS

1. An antenna comprising an electrical reference plane; a planar
5 conductive element, the electrical reference plane and planar
conductive element being electrically coupled via a first coupling
means to define a first antenna resonant frequency; and a second
coupling means arranged to provide a high impedance path between
10 the electrical reference plane and the planar conductive element at the
first resonant frequency and a lower impedance path between the
electrical reference plane and planar conductive element at a second
frequency to define a second antenna resonant frequency.
2. An antenna according to claim 1, wherein the first coupling means
15 defines a first electrical reference point on the planar conductive
element.
3. An antenna according to claim 1 or 2, wherein the second coupling
20 means defines a second electrical reference point on the planar
conductive element when the second coupling means provides a lower
impedance path between the electrical reference plane and the planar
conductive element.
4. An antenna according to any of the preceding claims, further
25 comprising a feed section for supplying a signal to the antenna.
5. An antenna according to claim 4, wherein the feed section comprises
the first coupling means and a conducting element arranged parallel to
each other with the conducting element being connected to a feed

such that the first coupling means and the conducting element form a transmission line.

- 5 6. An antenna according to any of the preceding claims, wherein the planar conductive element is disposed opposite the electrical reference plane.
7. An antenna according to any of the preceding claims, wherein the lower impedance is less than 5 ohms.
- 10 8. An antenna according to any of the preceding claims, wherein the second coupling means comprises a filter.
- 15 9. An antenna according to any of claims 1 to 7, wherein the second coupling means comprises a switch movable between a first position for electrically isolating the electrical reference plane and planar conductive element and a second position for electrically coupling the electrical reference plane and planar conductive element.
- 20 10. A mobile radiotelephone having an antenna according to any of the preceding claims.
11. A portable radio device having an antenna according to any of the preceding claims.
- 25 12. An antenna substantially as hereinbefore described with reference to the accompanying drawings, and/or as shown therein.



Application No: GB 9910857.3
Claims searched: all

Examiner: Russell Maurice
Date of search: 9 August 1999

Patents Act 1977 Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK CI (Ed.Q): H1Q (QAA, QAX, QKA, QJC)

Int CI (Ed.6): H01Q (1/38, 5/00, 9/04)

Other: Online WPI EPODOC PAJ

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	EP 0630069 A NTT (see whole document, esp col 3, lines 19-34 & fig 12)	1-8 at least
X	WO 98/44588 A Qualcomm (see whole document, esp fig 2)	1
X	US 5561435 A Nalbandain (see whole document)	1 at least

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.